


GAMMA PHITS GPH-I34

for Icom SP-34 and SP-20

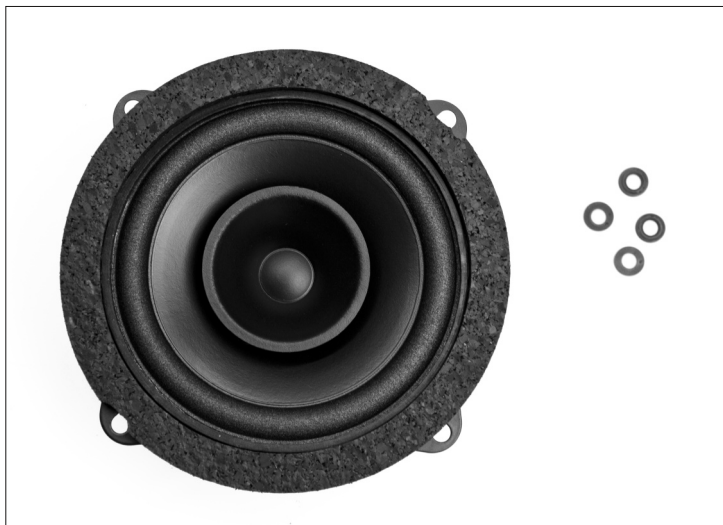

Specifications

Power:.....	20 W
Impedance:.....	4 Ohms
Frequency Response:.....	90-20000 Hz
Sensitivity:.....	86 dB
Weight:.....	268 g / 0,59 lb

Assembly

1. Disassemble carefully the speaker front panel by disconnecting all terminal blocks.
2. Remove the driver by releasing the four screws and the four brackets. In the SP-20 you must firstly remove the headphone connector plate.
3. Place the GPH-Y2K speaker with the terminals located on the lower part of the front panel and making sure the rubber ring fits properly.
4. Use the brackets again to fix the speaker, but this time inserting the nylon washers between them and the front panel.



5. Reconnect the positive and negative connectors. In the SP-20 model, assemble the headphone connector plate.
6. Assemble completely the speaker making sure all the connections are carefully replaced.
7. Enjoy your new sound!