

ASSEMBLY MANUAL PHITS-K23


1. Take the top cover and the front panel apart paying attention not to force the cables.
2. Remove the back cover's side screws.
3. Place plate A adjusting it against the back cover, under the connection terminal.



4. Place plates L and R.
5. Place plate B as shown in the picture below.



6. Place plate C between plates L and R and the back cover edge.

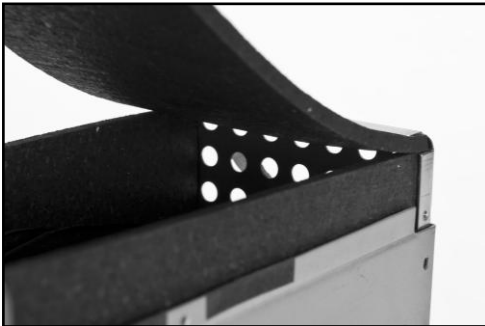

7. Push plate B against the back cover and place plate E as shown in the picture below.



8. Put the front panel together again and the back cover's side screws.
9. Place the alveolar foam as shown in the picture below.



10. Put the top cover back together and screw again.
11. To close together the speaker you might have to make a mild effort to guarantee a more efficient closure between the plates.

Your speaker is ready. Enjoy it!